

Module Key Features

Silently monitoring workspace utilisation and reporting back to a realtime client web dashboard - floorsense delivers powerful analytics on space utilisation to facilities managers and workspace planners.

- Unobtrusive underdesk wireless sensor
- Ultra low power consumption runs from a 3.6 volt Li-SOCl₂ battery. for a life span of 5+ years
- High performance self-healing mesh network using Smart Building IOT radio frequencies (doesn't conflict with existing WIFI networks)
- Simple installation using screwdriver and Android commissioning App
- Suits new fit-outs or in-situ retrofits of existing offices
- Reliable operation and minimal false positives via intelligent detection algorithm
- Low cost all inclusive pricing No IT project required
- Combine with floorsight top-of-desk module for a complete desk reservations and utilisation tracking solution

Product Specifications

Performance:

Angle of Detection: $42^{\circ} \times 180^{\circ}$ Maximum Range (Direct line of sight): 3m (9ft)
Operating Voltage: 3.3-5V

Environmental

Operating Temperature Range: 5 - 40°C
Storage Temperature Range: -15 - 70°C

Humidity: 0 to 95% relative humidity, (non-condensing)

ESD: ±15kV Air and ±8kV Contact

Environmental Sealing: IP32 standards for moisture and particle intrusion

Drop: Withstands multiple 1 m (3 ft) drops to concrete

Connectivity Options

Backhaul Wireless Network: 915MHz or 2.4GHz Thread (6LoWPAN, IPv6)

Management Network: LAN Connection to Thread IPv6 network provided

by floorsense controller/gateway (sold seperately).

1 controller required per 250 floorsense devices

Physical*: 3.5mm Stereo

Power Options

Battery: 3.6V Li-SOCI2 Battery

Typical Battery Life: 5+ years

Ordering Information: FSNSE-M-915-V2


 ${}^*When coupled with floor sight desk reservation system, low voltage power to floor sense module is provided via the 3.5 mm.$


Warranty

Floorsense systems come with a 24 month warranty.




Physical Dimensions (mm)

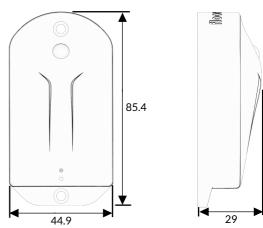

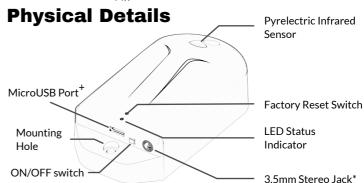

- * Used for coupling with floorsight desk reservation systems.
- + Used for programming and providing external power (5V) When required).

Sensor Detection Detail



The range of detection is directly proportional to the height of the desk. For a desk equipped with adjustable height, the recommended distance from the front edge of the desk to the front of the module is 300mm. See Floorsen.se/support for more information.

Reseller Contract